

4-axis
machining centres

H

HELLER



HELLER solutions: **Knowing how it's done.**

Tailor-made off the peg

The perfect 4-axis machining centre must be capable of being configured to your requirements, produce reliably even under extreme loads and offer a fair price/performance ratio. Our solution: HELLER H series 4-axis machining centres. Components that have been reliably used in mass production for years coupled with a high dynamic guarantee you robust processes – even at their limits, seven days a week in 3-shift operations.



All information available at:
www.heller.biz/en/h






Key facts

- _ horizontal 4-axis machining centres with pallet changer as standard
- _ designed for highly stable processes and highly resilient even at its limits
- _ highly standardised and Individually configurable
- _ high productivity through efficient performance and short idle times
- _ short chip-to-chip times thanks to the quick tool changer and high axis dynamic
- _ robust and reliable technology for high availability and longevity
- _ can be used for a wide range of different parts and materials
- _ ideal solution for the series production of small to medium batch sizes
- _ easy to automate with workpiece or pallet automation
- _ broad range of sizes suitable for almost any workpiece

At a glance

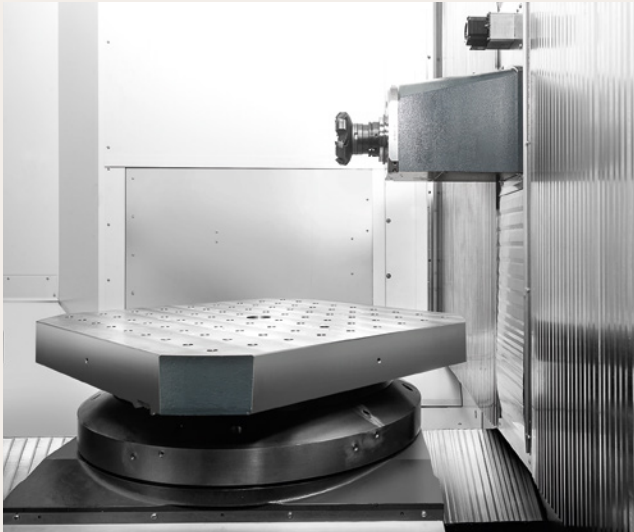

Machine concept

The rigid design and topology-optimised structural components are the basis from which the H series achieves its high cutting performance and accuracy. You can also rely on top quality – with high productivity.


- _ horizontal 4-axis machining centres
- _ the table executes the feed movement, the column traverses in the X-direction and carries the spindle unit
- _ high stability and damping in the force flow through topology-optimised structural components from cast iron
- _ linear axes with stable roll guides for high feed forces driven by ball screws
- _ direct, absolute measuring systems (glass scales) for optimised precision
- _ rotary axis B executed as an NC-rotary feed table with gear drive for high circular milling torque and damping
- _ pallet changer as standard



Machining units

Spindles “Made by HELLER” are among the highlights of our H series. Thanks to in-house production expertise, they guarantee you the highest possible machining quality and, above all, process stability and optimised performance in operation.


- _ 3 HSK-A 63 spindles (H 2000/4000) and 6 HSK-A 100 spindles (H 5000/6000) to choose – with the new Dynamic Cutting spindle perfect for universal use
- _ 5 HSK-A 100 spindles (H 8000 – H 16000) to choose, including 3 with gear units for extreme torque requirements
- _ rigid cast iron guide slide with high dynamic stiffness and damping
- _ high precision through compact overall dimensions and spindle neck cooling
- _ HELLER zero spindle system for fast and simple spindle replacement

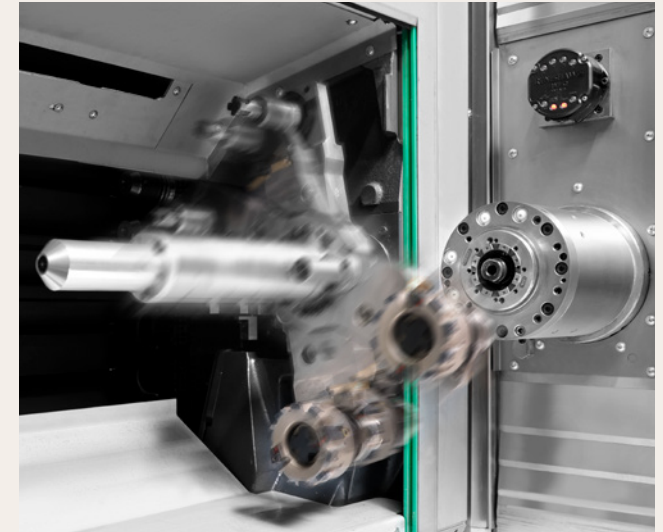

Tool management

Short tooling times and short non-productive times – what you can rightly expect from the H series. The tool changer with two NC-axes achieves maximum precision and optimum movement sequence for short tool change times. The result, in combination with a high axis dynamic, is short chip-to-chip times.


- _ chain-type magazines with up to 240 places for machines with HSK-A 63 or up to 150 places for machines with HSK-A 100 (SK/BT for selected machining units)
- _ always precise tool provision during machining through traverse attachment between chain and tool changer
- _ rack-type magazines with 375 places for machines with HSK-A 63 or up to 425 places for machines with HSK-A 100 (SK/BT for selected machining units)
- _ tool changer with two NC-axes and high dynamic for short chip-to-chip times

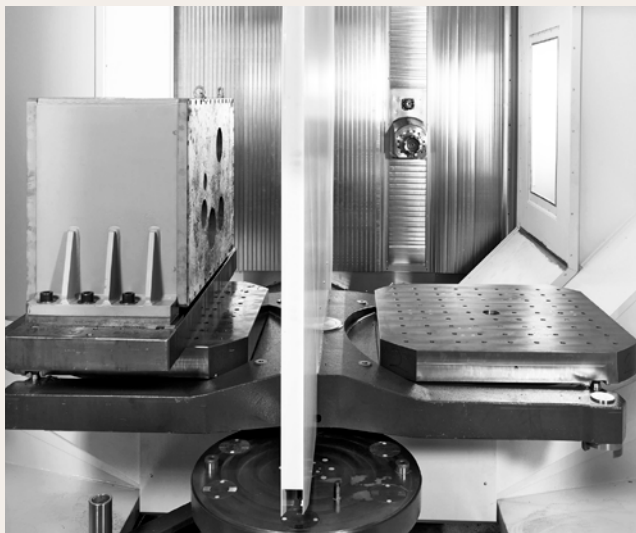

Workpiece management

The H series knows no bounds when it comes to workpiece size and weight. The machine's pallet changer concept permits a payload of up to 8 t. The H series works to a high degree of precision even with this workpiece weight.

- _ pallet changer with lift/swivel principle (H 16000 with push/swivel principle)
- _ NC-rotary feed table with gear drive for high tangential and circular milling torque
- _ YRT bearing for high rigidity and highly reliable tilting moments thanks to compact design
- _ infinitely rotating, manual workpiece setting station, lockable at 90° indexing with foot unlocking
- _ optionally with media interface for hydraulic workpiece clamping
- _ automatic workpiece loading by robot or pallet automation

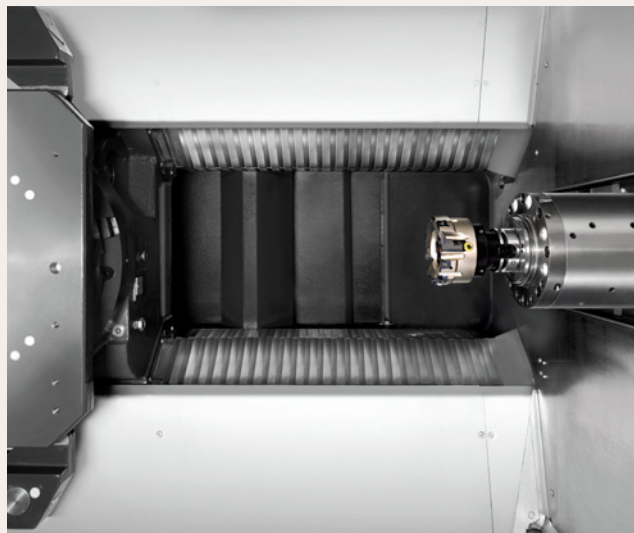

Supply and disposal

Extremely resilient and reliable machining centres, the H series machines are made for production. To keep your results precise at all times, we have an efficient solution for disposal wherever chips accumulate.

- _ central media supply area at the rear
- _ coolant units with paper band filter or reversible flow filter with high tank volume optional
- _ internal coolant supply at 50 bar (70 bar as an option)
- _ work area shower with numerous adjustable nozzles flushes the workpiece and the fixture
- _ free chip fall and central chip conveyor for quick disposal to the rear (H 2000 - H 6000)
- _ chip disposal with spiral conveyors to the rear to a transverse conveyor (H 8000 - H 16000)
- _ steep side walls, concertina covers with self-cleaning effect, continuous flushing of the machine bed accelerates chip disposal



Operation, maintenance and control


No matter whether on the workpiece setting station, during tool setting, programming or maintenance – your comfort and safety and, above all, the productivity of your manufacturing facility is paramount at all times.

- _ clear operating concept and good accessibility to all work areas
- _ smooth-running doors and optimally arranged controls
- _ supply units and maintenance points are concentrated at just a few locations and can be accessed quickly and easily
- _ Siemens SINUMERIK 840D sl and Fanuc 31i-B state-of-the-art machine controllers
- _ main operating unit designed as a console with 24" multi-touch screen and HELLER Operation Interface for optimum operating comfort on machines with Siemens control systems (as standard for H 2000 - H 6000, otherwise optional)

Technical data

		H 2000	H 4000	H 5000	H 6000
Positioning range X/Y/Z	mm	630/630/630	800/800/800	800/800/800	1,000/1,000/1,000
Tool shank SK/BT for selected units available as alternative	Size	HSK-A 63	HSK-A 63	HSK-A 100	HSK-A 100
Clamping surface Nominal size	mm	400 x 500	500 x 630	630 x 630	630 x 630
Clamping load Power [Speed]	kg	800	1,400	1,400	1,400
		H 8000	H 10000	H 14000	H 16000
Positioning range X/Y/Z	mm	1,250/1,200/1,100	1,600/1,400/1,300	2,400/1,600/1,600	2,400/1,600/1,600
Tool shank SK/BT for selected units available as alternative	Size	HSK-A 100	HSK-A 100	HSK-A 100	HSK-A 100
Clamping surface Nominal size	mm	800 x 800	1,000 x 1,000	1,000 x 1,000	1,250 x 1,600
Clamping load Power [Speed]	kg	2,000 [1,250]	4,000	4,000	8,000

[] = optional values

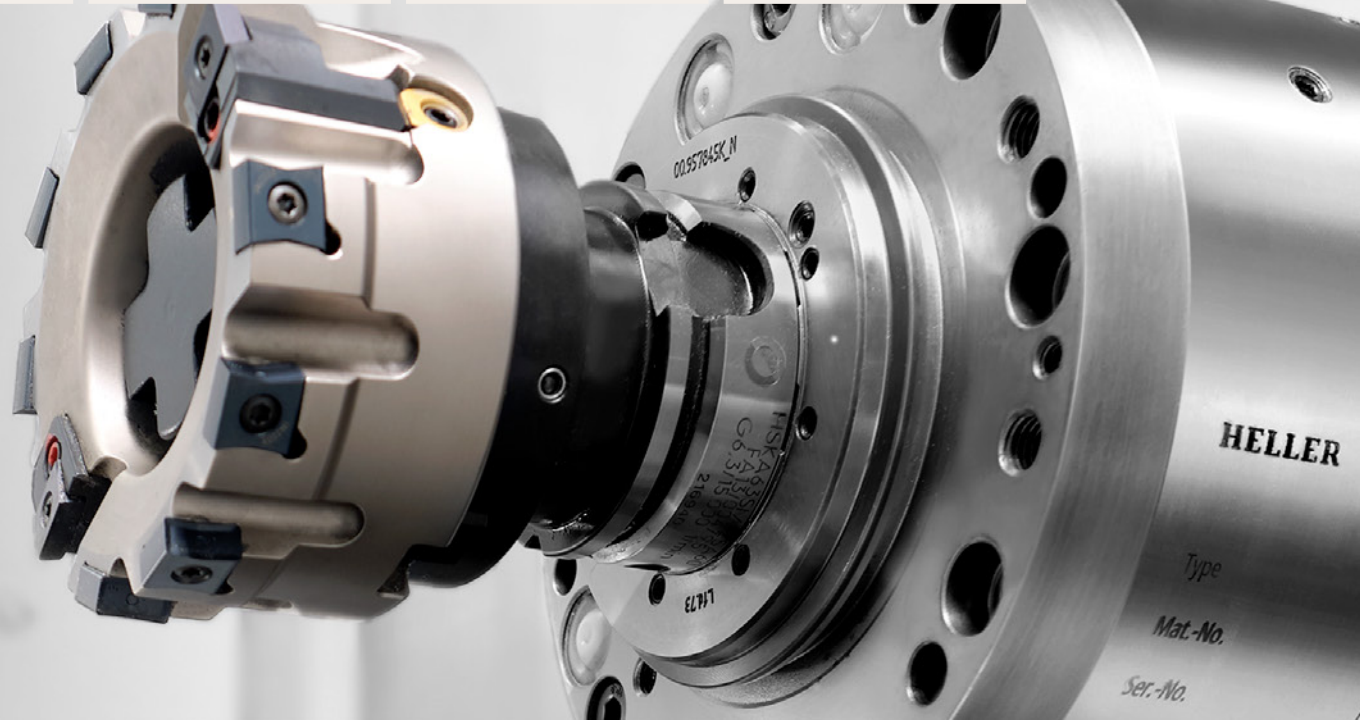


Productivity over the full spectrum



4-axis machining centres

H

Tailor-made off the peg: Flexibly configurable 4-axis machining centres with unbeatable productivity for unique capacity



5-axis machining centres

HF

Productivity in 5 axes: 5-axis machining centres with the fifth axis in the workpiece for dynamic and productive machining



5-axis machining centres

F

The benchmark in 5 axes: 5-sided and simultaneous 5-axis machining with the fifth axis in the tool



5-axis milling/turning machining centres

C

Complete machining at its best: Combined milling/turning jobs on one machine



Flexible manufacturing systems

Highly-productive series production of light duty to heavy duty automotive components





Gebr. Heller Maschinenfabrik GmbH
Gebrüder-Heller-Straße 15
72622 Nürtingen, Germany
info@heller.biz
www.heller.biz

This brochure is intended exclusively for advertising purposes. It does not constitute an integral part of a contract, a guarantee or an offer. We reserve the right to make interim modifications to technical data, specifications or equipment and we do not accept any liability for errors and misprints. The illustrations used may contain options subject to a surcharge.
© 06.2021 Gebr. Heller Maschinenfabrik GmbH